


# Firm Thermostatic Bath Shower Mixer c/w Legs (No Kit) - MSTAF110

MY STYLE

<b>CONSTRUCTION</b>	Brass Body (CuZn38Pb18); ABS Handles
<b>FINISHES</b>	Chrome (Ni : 8-12um, Cr : 0.25-0.3um)
<b>PRODUCT TYPE</b>	Contemporary
<b>WATER PRESSURE</b>	Min. 0.5 Bar, Max. 6.0 Bar
<b>PLUMBING SYSTEMS</b>	Suitable for all Plumbing Systems, Hot and Cold Water Pressure Preferably Balanced; Max. Supply Pressure Differential Requirement No Greater than 5:1
<b>STANDARDS</b>	Complies with BSEN 1111
<b>AERATOR</b>	Neoperl Spout Aerator
<b>CARTRIDGE</b>	Thermostatic Cartridge
<b>DIVERTED</b>	Integrated Ceramic Disc Valve Diverter
<b>NET WEIGHT</b>	2.47 Kg
<b>FITTING</b>	Brass G3/4" BSP Deck Mounted Pillars
<b>ADDITIONAL INFORMATION</b>	<ol style="list-style-type: none"> <li>1. Temperature: Pre-set 38°C, with Push Button Override to 48°C</li> <li>2. Automatic Shut Off in the Event of Hot or Cold Water Supply Failure</li> </ol>

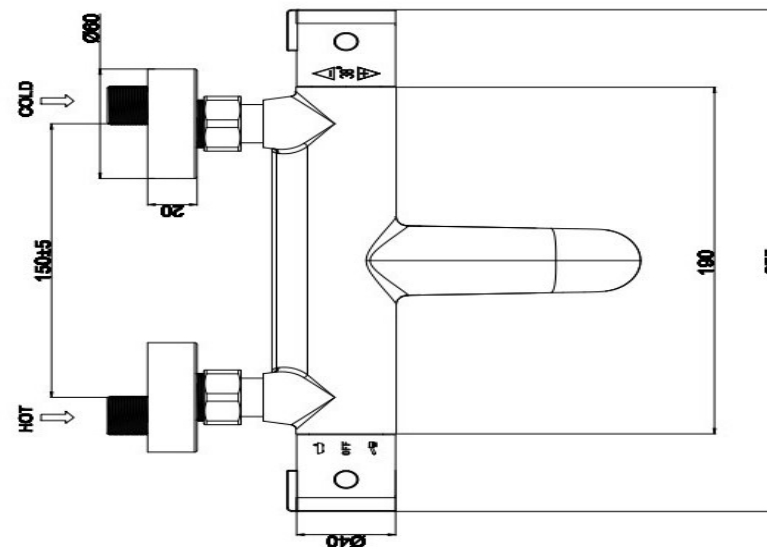

## Flow Rates (Litres per minute)

SYSTEM PRESSURE	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
	6.2	7.0	-	9.6	12.6	-	17.4	22.0	-	-

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.