


Creek Bath Filler - MSTACR4

CONSTRUCTION	Brass Body (HPb57-3), EN CW614N / CuZn39Pb3 (equivalent to BS CZ 121) Zinc-Alloy Handles & Base Plates
FINISHES	Chrome
PRODUCT TYPE	Contemporary
WATER PRESSURE	Min. 0.2 Bar, Max. 5.0 Bar
PLUMBING SYSTEMS	Suitable for All Plumbing Systems, Hot and Cold Water Pressure Preferably Balanced Max. Supply Pressure Differential Requirement No Greater Than 5:1
STANDARDS	Complies with BS5412, BS EN200
CERTIFICATION	WRAS approved and certified
NET WEIGHT	1.814 KG
CARTRIDGE	G3/4" Quarter turn cartridge
FITTING	G 3/4" inlet, plastic fastening nut
AERATOR	M24*1

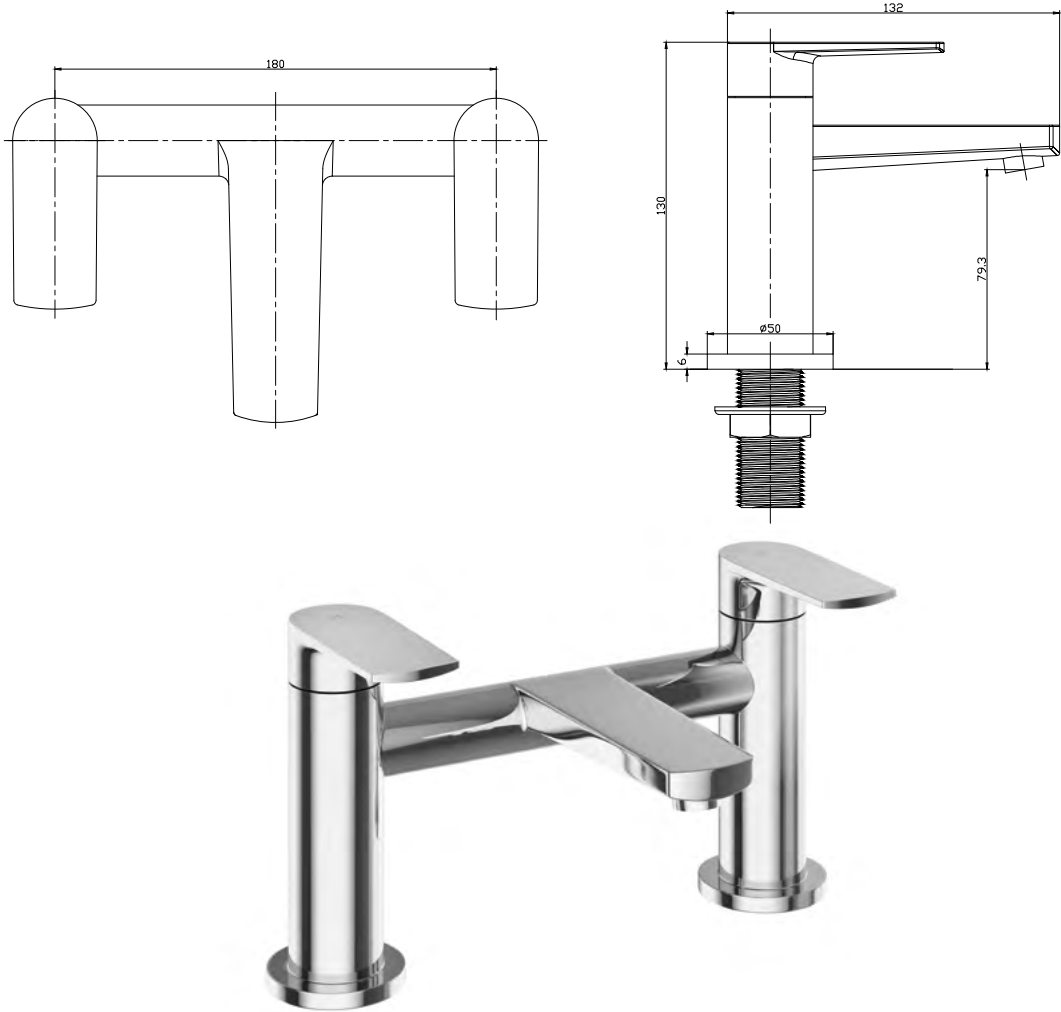

Flow Rates (Litres per minute)

SYSTEM PRESSURE	0.2 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2 Bar	2.5 Bar	3.0 Bar	5.0 Bar
	6.7	12.8	19.1	24.1	27.9	31.5	34.6	44.6

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.